


**PRODUCT LEGEND**

1	INLET NIPPLE (1" MPT)
2	NUT
3	ISOLATION RING
4	COLLAR / WELD FITTING
5	STAINLESS STEEL FLEXIBLE BRAIDED HOSE (1" NOMINAL DIAMETER) (AH2) (LENGTHS AVAILABLE 31", 36" 48", 60", & 72")
6	COLLAR / WELD FITTING
7	NUT
8	V36 DRY SPRINKLER ASSEMBLY
9	NUT
10	LOCK WASHER
11	BASE PLATE
12	RUBBER PLUG
13	VIC MECHANICAL-T OUTLET STYLE 922 FIRELOCK (1" FMPT)
SEE VICTAULIC SUBMITTAL NUMBER 10.90	

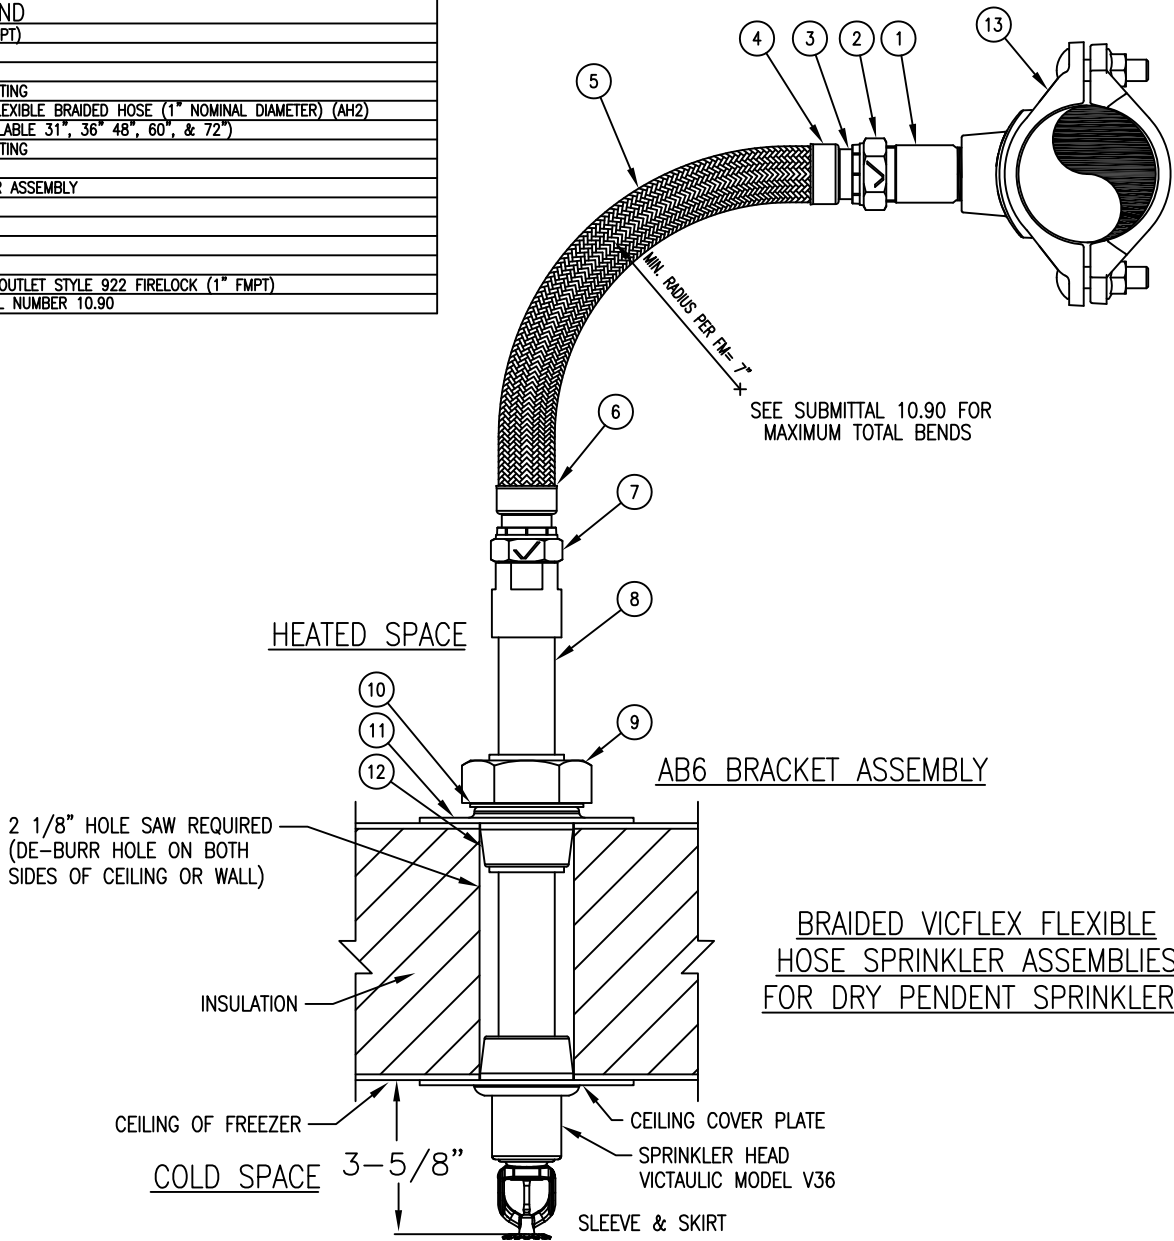

SEE SUBMITTAL 10.90 FOR  
MAXIMUM TOTAL BENDS

HEATED SPACE

AB6 BRACKET ASSEMBLY

2 1/8" HOLE SAW REQUIRED  
(DE-BURR HOLE ON BOTH  
SIDES OF CEILING OR WALL)

INSULATION

CEILING OF FREEZER

COLD SPACE

3-5/8"

CEILING COVER PLATE

SPRINKLER HEAD  
VICTAULIC MODEL V36

SLEEVE & SKIRT

**BRAIDED VICFLEX FLEXIBLE  
HOSE SPRINKLER ASSEMBLIES  
FOR DRY PENDENT SPRINKLERS**



**NOTES:**

- REFER TO VICTAULIC SUBMITTAL 10.90 FOR  
ADDITIONAL DETAILS.

<b>Victaulic</b>		CONSTRUCTION PIPING SERVICES DIVISION	
PROJECT: _____	PROJ.# _____		
CUSTOMER: _____	P.O.# _____		
SYSTEM: VICFLEX SERIES AB6 BRACKET FOR DRY PENDENT SPRINKLERS			
REF. DWG.: VICTAULIC SUBMITTAL 10.90			
DRN.BY: RGS	DATE: 08/05/13	DRAWING NUMBER	REV.
CHK.BY: .	DATE: .	VICFLEX-B-SS	A